

Phone:+98 34 32455581

Email:info@taksaniroo.com

Web:WWW.taksaniroo.com


Taksa Niroo
Kerman




مستند نقشه فنی فلیم اسکنر (Flame Scanner)

تصاویر فلیم اسکنر (Flame Scanner)




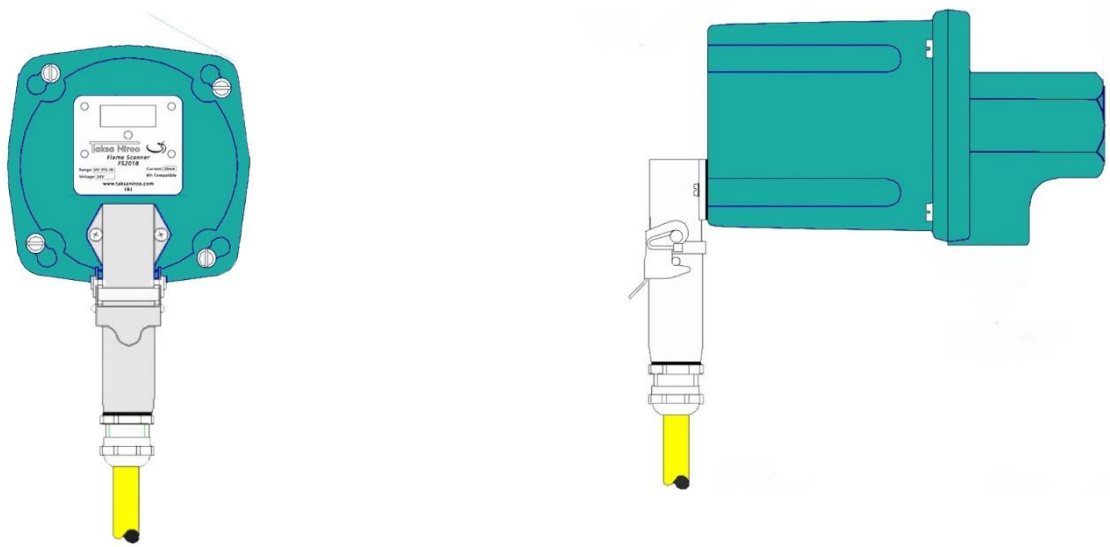

بلوک دیاگرام فلیم اسکنر (Flame Scanner)

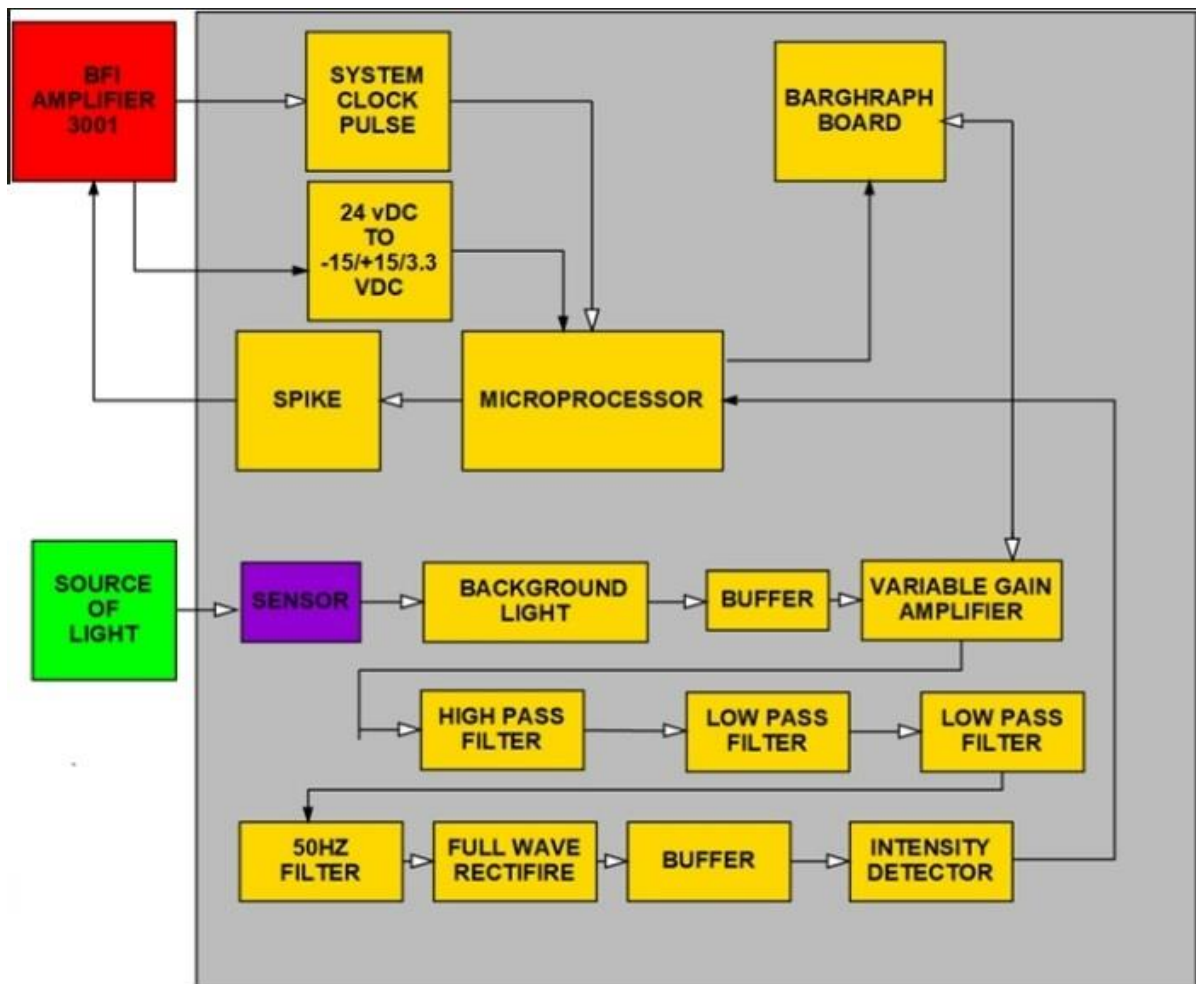

تصویر برد فلیم اسکنر (Flame Scanner)

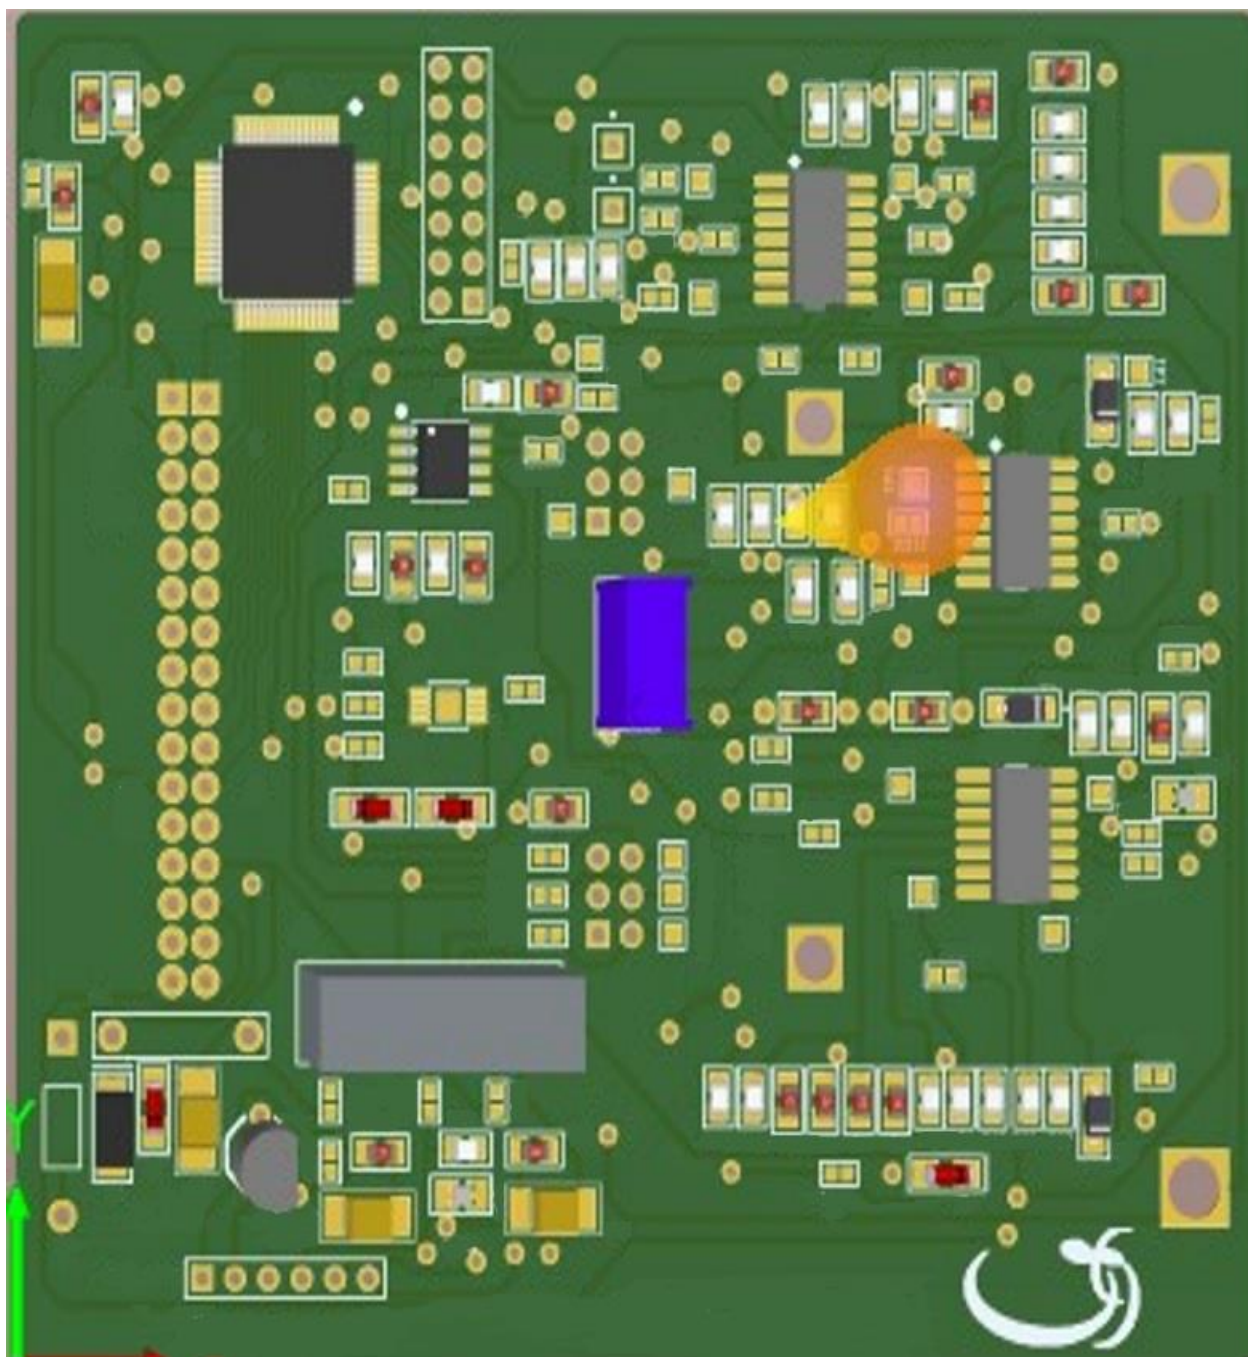

جدول اطلاعات فنی فلیم اسکنر (Flame Scanner)

Spectral sensitivity	200 to 1200 nm
Viewing angle	1°, 2° oder 3°
Self-monitoring	Fully electronic
Operating voltage	24 V DC, inner electrical isolation
Current consumption	Max. 30ma
Operating temperature range	-20 to +85 °C
Electric connection	Dust-proof plug connector
Protection	IP 65
Length of cable	Max. 1000m (KW 5)
Sight tube connection	1" internal thread. ISO 228
Purging air connection	1/2" internal thread ISO 228
Purging air quantity	10 Nm ³ /h
Or	
Purging air pressure	0,02 bar over combustion chamber inner pressure
Weight	approximate 1kg
Part no.	FS201

نقشه فلیم اسکنر (Flame Scanner)

